


Loft

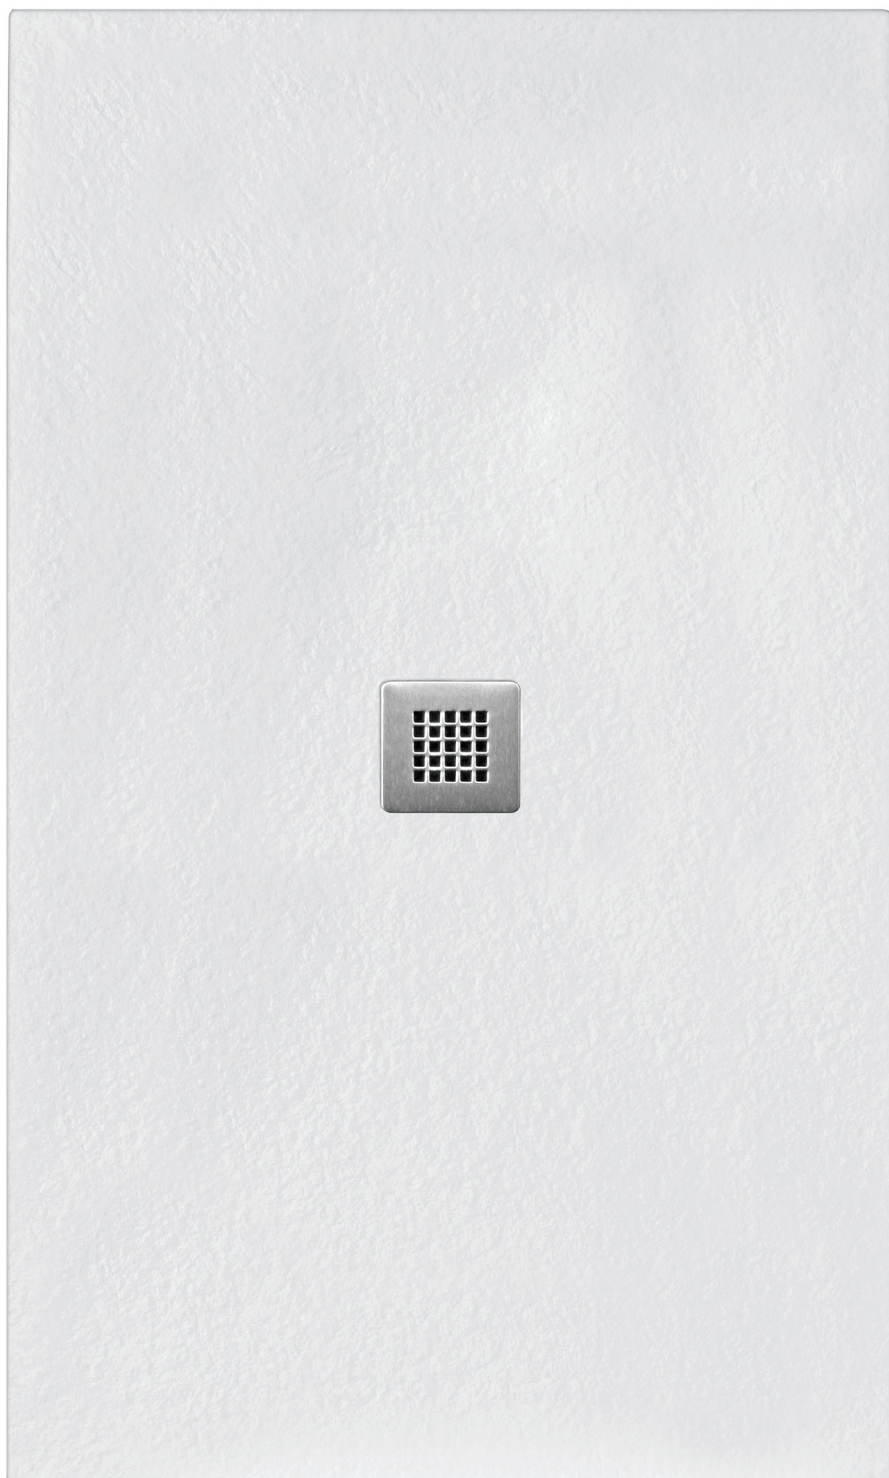

.Nuovvo

TECHNICAL DATA SHEET

The **Loft** shower tray combines contemporary design, functionality and Nuovvo's timeless essence. Its elegant aesthetic is enhanced by a stainless steel grate that adds a modern and durable touch.

Designed to adapt to a wide range of bathroom projects, Loft features a non-slip, resistant and easy-to-maintain surface, making it ideal for those seeking both style and comfort in a single product.

● **Material:**

Nuovvotech is an advanced material made of resin and silica-free mineral filler, coated with a layer of gel coat that provides extraordinary resistance. Its innovative design makes it possible to create bathroom products with unique textures, shapes, and colors, taking customization to the next level.



● **Properties:**

- Manufactured in a mold through casting, giving each shower tray a non-slip surface.
- Standard UNE 41091:2017 CLASS 2. Standard DIN 51097:1992 CLASS B
- Can be easily cut with a diamond blade.
- High-flow drain with stainless steel grate.
- Compatible with access ramp.

Non-slip



5-year warranty



Accessible siphon



Silica-free material



Adaptable to the space



Large format




Made in Spain



Nuovvotech grid included



● Dimensions:

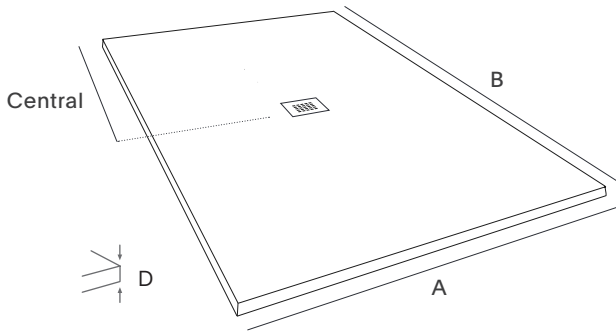


(cm)

| | | B | | | | | | | | | |
|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | | 80 | 90 | 100 | 120 | 140 | 160 | 180 | 200 | 220 | 240 |
| A | 70 | - | - | - | - | - | - | - | - | 2,5 | - |
| | 75 | - | - | - | - | - | - | - | - | 2,5 | - |
| | 80 | 2,5 | - | - | - | - | - | - | - | 2,5 | - |
| | 90 | - | 3,0 | - | - | - | - | - | - | 3,0 | 3,0 |
| | 100 | - | - | 3,0 | - | - | - | - | - | - | 3,0 |
| | 120 | - | - | - | 3,0 | 3,0 | 3,0 | 3,0 | 3,0 | 3,0 | 3,0 |


● Valves:

Screwed A



30 l/min
Maximum flow rate

Vertical N




60 l/min
Maximum flow rate

- Valve included
Screwed A (stainless steel), Vertical N (stainless steel)

- All our shower trays comply with the drainage requirements established in the UNE EN 251:2014 standard: Shower trays. Connection dimensions.

● Colours and texture:

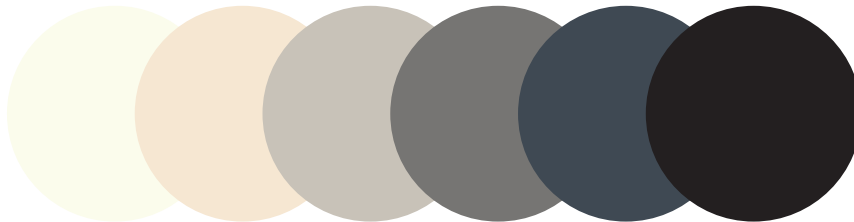


White Nova Ivory RAL 1013 Stone grey RAL 7044 Concrete RAL 7037 Anthracite RAL 7015 Black RAL 9005



In addition to these **6 standard colours**, any **RAL colour upon request** can also be ordered.

● Accessories:


Access ramp

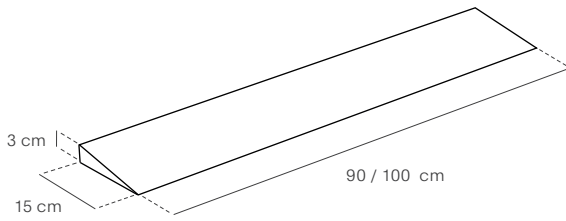

- Access ramp not included.



● Custom manufacturing:

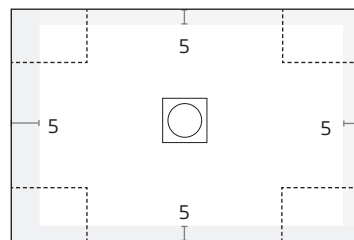

Loft

- Maximum cuttable area for intermediate dimensions between standard sizes.
- Approximate area for special cuts.

Customisable in both width and length. The customer may provide a technical drawing when placing the order to receive the tray perfectly cut to the desired size. Cuts different from those shown in the drawing are possible upon customer request, taking into account the model's particularities and the effect such cuts may have on the tray's aesthetics and functionality. Cutting on the drain side is not recommended.

- Segments are cut continuously with a diamond blade (tile special).
- Large cuts may reduce the slope and cause an irregular edge thickness.
- Upon customer request, cut edges can be polished.

NOTICE: There is a production tolerance margin of up to 1 cm. Tray thickness tolerance is +/- 3 mm. Width and length tolerance of the material is +5 mm.

* Nuovvo will only guarantee the tray's strength for cuts made within the grey area. For other cuts, please consult.

● Installation options:



Flush



On the floor



Semi-recessed with a masonry curb


NOTICE: To install the flush shower tray, a minimum floor depth of 8 cm is required to allow enough space for valve installation.

● Use and maintenance:

- Clean regularly, rinsing thoroughly and ensuring no cleaning product residues remain.
- Use a soft cloth or wipe to clean the surface.
- Avoid regular cleaning with bleach*, alcohols, acids, nail polish removers, lacquers and/or abrasive products.
- Do not use sodium hydroxide (caustic soda) or hair dyes due to their high methylene blue concentration.

* The grid may be damaged.

Nuovvo

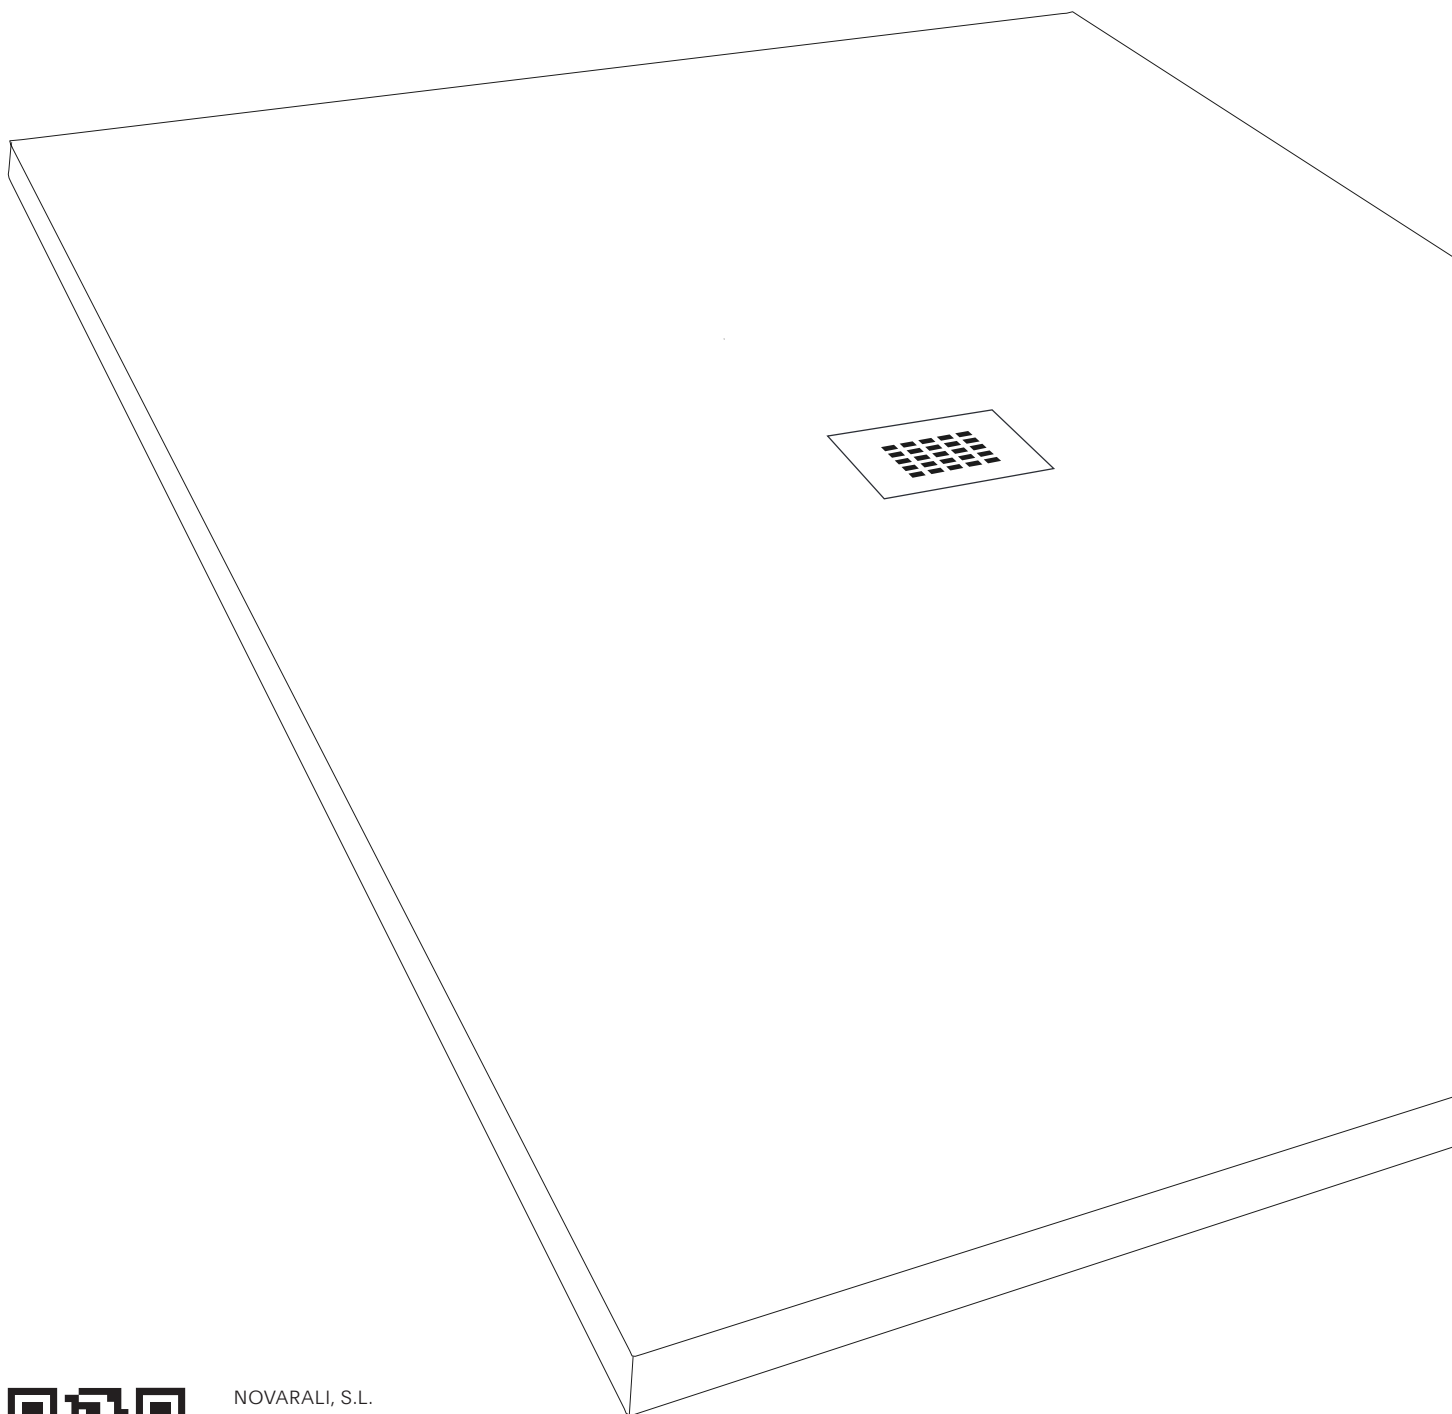

NOVARALI, S.L.
C/ Portugal, 4
P.I. San Carlos
03370 Redován, Alicante, Spain
T. +34 965 681 207
info@nuovvo.com
www.nuovvo.com